尤越电气

WENZHOU UNIQUE ELECTRIC CO.,LTD.

温州尤越电气有限公司

Add: Room 201, Block 1, Jinshuiwan Carden, Chengnan Street,
Yueqing, Zhejiang, China
Tel: 0086-577-61589577
Fax: 0086-577-61585086
Whatsapp: 8613757780620
P.C: 325600
Http://www.yqunique.com
E-mail: info@yqunique.com

尤越电气

UNIQUE ELECTRIC

Fine manufacturing
Wonderful presentation

精雕细琢 精彩呈现 WWW.YQUNIQUE.COM

WENZHOU UNIQUE ELECTRIC CO.,LTD.

温州尤越电气有限公司

About us

关于我们

Wenzhou Unique Electric Co.,Ltd. is an enterprise, which is specialized in manufacturing, marketing and R&D of automatic terminal lug assemble machine, lugs machine, stamping mould, automatic wire crimping machine and wire terminal & connector, crimping tools and switching power supply, high& low voltage electric appliance and so on. The product is widely used in electronic and electric, information communication, automobile electronic, safety production, space and aviation, petrochemical industry and building industry etc. The qualification of most product has met the technical and quality standard of Germany, UK, The U.S.,other developed countries.

Wenzhou Unique Electric Co.,Ltd. has established a whole set of management system. We have a high quality personnel, combining sales, production and R&D, in which there are 4 people having masters'degree, 6 with bachelor's degree and more than 80% have got college education. Unique Electric has wholesome selling procedure and rigorous testing process, we ensure to provide our clients with 100% satisfactory quality product. We continually develop various kinds of new product according to the market trend and have established our own brands as "YQUNIQUE" and "MAGIDE". The mission of our company is "To create high efficient electric solution" and we aim at establishing a company image of "making perfection more perfect, keeping forward, pursuing inno-vation, be brave in practice"; The most automatic machines, electric, wire terminal, hydraulic and other product have already passed CE certification. 70% of the product are sold to more than 50 countries and regions such as the America, Japan, South Korea, Canada, Europe, South America, Australia, Southeast Asia, and Africa and so on and has got popularity among various countries and regions.

Unique Electric thank the friends from all social walks for your support and reliance, we'll persist on inheriting the enterprise culture, cultivating scientific and technological talents, fulfilling social responsibility. All the staff of our company are expecting to go with you hand in hand, and cooperate win-win, hope we go together for a "professional, safe, reliable" long life greatness. Unique Electric thank the friends from all social walks for your support and reliance, we will persist on inheriting the enterprise culture, cultivating scientific and technological talents, fulfilling social responsibility. All the staff of our company are expecting to go with you hand in hand, and cooperate win-win, hope we go together for a "professional, safe, reliable" long life greatness.

To create high efficient electric solution

定制类机器/Customized Automation Machine

定制类冲压模具/Customized Stamping Mould

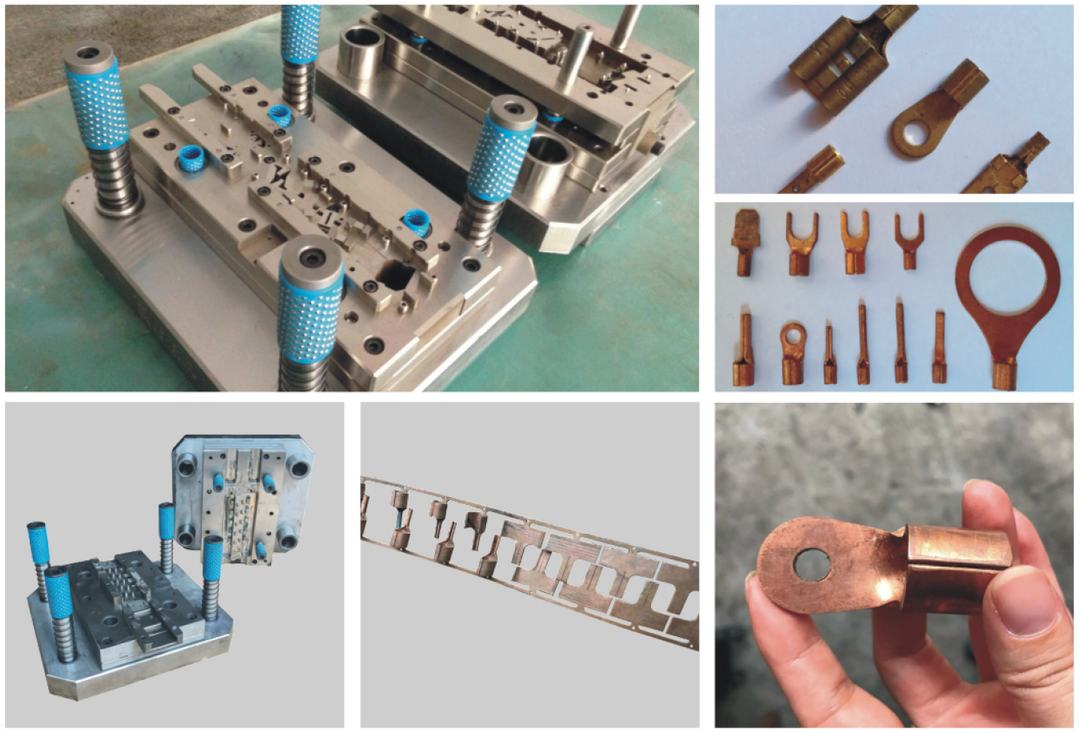

全自动双头倒角机YE-Z1/Automation double chamfering machine



机器特点

1.分为振动盘与人工排料。
2.PLC控制，精准稳定。
3.刀盘采用锥度式，刀头研磨方便。

Machine Characteristics

1.It can be divided into vibrating plate and manpower discharging.
2.Control by PLC, stable and correct.
3.Taper type cutter head, convenient for grinding of tool bit.

项目 Project	技术参数 Technical parameters
电源电压The power supply voltage	380V 50Hz
外部气压The external air pressure	0.6-0.8MPa
工件长度The workpiece length	7-52mm
加工直径Machining diameter	管料 Pipe tube 1.5sqmm to 300sqmm
加工速度Processing speed	每分钟加工次数30-40次 Processing times 30 to 40 times per minute
长度公差The length of tolerance	±0.05mm
电机功率The motor power	0.75kW/1.1kW
主轴转速Spindle speed	1400r/min.2800r/min
送料方式Feeding way	自动料仓 Automatic vabition
加工范围Processing range	适合各种金属材质管材、内角、外角、棒料两头倒角平面Suitable for copper tube and aluminum tube, inside, outside, two head chamfering flat bar
机器尺寸/重量Machine size/weight	1220mm*800mm*1430mm/400kg

全自动双头倒角机YE-Z1S/Automation double chamfering machine





机器特点

1.分为振动盘与人工排料。
2.PLC控制，精准稳定。
3.刀盘采用锥度式，刀头研磨方便。

Machine Characteristics

1.It can be divided into vibrating plate and manpower discharging.
2.Control by PLC, stable and correct.
3.Taper type cutter head, convenient for grinding of tool bit.

项目 Project	技术参数 Technical parameters
电源电压The power supply voltage	380V 50Hz
外部气压The external air pressure	0.6-0.8MPa
工件长度The workpiece length	40-280mm
加工直径Machining diameter	管料 Pipe tube Φ5-Φ30,棒料Bar tubeΦ5-Φ30
加工速度Processing speed	每分钟加工次数30-40次 Processing times 30 to 40 times per minute
长度公差The length of tolerance	±0.05mm
电机功率The motor power	0.75kW/1.1kW
主轴转速Spindle speed	1400r/min.2800r/min
送料方式Feeding way	手摆料/自动料仓 Hands up/automatic feeder
加工范围Processing range	适合各种金属材质管材、内角、外角、棒料两头倒角平面Suitable for copper and aluminum pipe, inside, outside, two head chamfering flat bar
机器尺寸/重量Machine size/weight	1220mm*800mm*1430mm/400kg

全自动双头倒角机YE-Z2/Automation double chamfering machine





机器特点

1.分为振动盘与人工排料。
2.中心点调整方便，长短尺寸用齿轮齿条调整，精准稳定。
3.刀盘采用锥度式，刀头研磨方便。

Machine Characteristics

1.It can be divided into vibrating plate and manpower discharging.
2.Convenient regulation of central point, long or short dimension can be regulated by gear rack, it is accurate and stable.
3.Taper type cutter head, convenient for grinding of tool bit.

项目 Project	技术参数 Technical parameters
电源电压The power supply voltage	380V 50Hz
外部气压The external air pressure	0.6-0.8MPa
工件长度The workpiece length	8-100mm
加工直径Machining diameter	管料 Pipe tube Φ2.5-Φ16,棒料Bar tube Φ2-Φ6
加工速度Processing speed	每分钟加工次数30-40次 Processing times 30 to 40 times per minute
长度公差The length of tolerance	±0.05mm
电机功率The motor power	0.75kW/1.1kW
主轴转速Spindle speed	1400r/min.2800r/min
送料方式Feeding way	振动盘 Vibrating disk
加工范围Processing range	适合各种金属材质管材、内角、外角、棒料两头倒角平面Suitable for copper tube and aluminum tube, inside, outside, two head chamfering flat bar
机器尺寸/重量Machine size/weight	1220mm*800mm*1600mm/395kg

全自动双头倒角机YE-Z2S/Automation double chamfering machine





机器特点

1.分为振动盘与人工排料。
2.中心点调整方便，长短尺寸用齿轮齿条调整，精准稳定。
3.刀盘采用锥度式，刀头研磨方便。

Machine Characteristics

1.It can be divided into vibrating plate and manpower discharging.
2.Convenient regulation of central point, long or short dimension can be regulated by gear rack, it is accurate and stable.
3.Taper type cutter head, convenient for grinding of tool bit.

项目 Project	技术参数 Technical parameters
电源电压The power supply voltage	380V 50Hz
外部气压The external air pressure	0.6-0.8MPa
工件长度The workpiece length	40-280mm
加工直径Machining diameter	管料 Pipe tube Φ5-Φ30,棒料Bar tube Φ5-Φ30
加工速度Processing speed	每分钟加工次数30-40次 Processing times 30 to 40 times per minute
长度公差The length of tolerance	±0.05mm
电机功率The motor power	0.75kW/1.1kW
主轴转速Spindle speed	1400r/min.2800r/min
送料方式Feeding way	手摆料/自动料仓Hands up/automatic bin
加工范围Processing range	适合各种金属材质管材、内角、外角、棒料两头倒角平面Suitable for copper tube and aluminum tube, inside, outside, two head chamfering flat bar
机器尺寸/重量Machine size/weight	1220mm*800mm*1430mm/400kg

管型预绝缘端子组装机 Automatic tubular terminal assemble machines



机器特点

1.全电脑控制，PLC控件操作，运行稳定。
2.在组装运行的过程中，如果有问题传感器控制自动关机保护原材料和机械设备。
3.个人可以同时操作几台机器。

Machine Characteristics

1. Total computer are controlled. PLC organize from feeding to assembling. It is running steady, save motor here.
2. There are sensors to detect the process of feeding and assembling, if there are problem will automatically shut down to protect the raw materials and machinery.
3. One person can operate several machines at the same time.

项目 Project / 机型Models	技术参数 Technical parameters											
	YE-E03	YE-E05	YE-E75	YE-E10	YE-E15	YE-E25	YE-40	YE-60	YE-100	YE-160	YE-250	YE-350
电源电压The power supply voltage	220V 50Hz											
外部气压The external air pressure	0.6-0.8MPa											
加工速度Processing speed	每分钟生产150-180只 Production of 150-180 per minute								每分钟生产120-150只 Production of 120-150 per minute			
电机功率The motor power	400W											
加工范围Processing range	#24AWG	#22AWG	#20AWG	#18AWG	#16AWG	#14AWG	#12AWG	#10AWG	#7AWG	#518AWG	#4AWG	#2AWG
机器尺寸/重量Machine size/weight	1200mm*700mm*1600mm/350kg											

全自动冷压端子组装机 Automatic terminal lugs assemble machines



机器特点

1.全电脑控制，PLC控件操作，运行稳定。
2.在组装运行的过程中，如果有问题传感器控制自动关机保护原材料和机械设备。
3.个人可以同时操作几台机器。

Machine Characteristics

1. Total computer are controlled. PLC organize from feeding to assembling. It is running steady, save motor here.
2. There are sensors to detect the process of feeding and assembling, if there are problem will automatically shut down to protect the raw materials and machinery.
3. One person can operate several machines at the same time.

项目 Project / 机型Models	技术参数 Technical parameters		
	YE-1B	YE-2B	YE-4B
电源电压The power supply voltage	220V 50Hz		
外部气压The external air pressure	0.6-0.8MPa		
加工速度Processing speed	每分钟生产80-120只 Production of 80-120 per minute		
电机功率The motor power	400W		
加工范围Processing range	22-16AWG	16-14AWG	12-10AWG
机器尺寸/重量Machine size/weight	1200mm*700mm*1600mm/350kg		

全自动压缩机 Automatic close end terminal assemble machines



机器特点

1.全电脑控制，PLC控件操作，运行稳定。
2.在组装运行的过程中，如果有问题传感器控制自动关机保护原材料和机械设备。
3.个人可以同时操作几台机器。

Machine Characteristics

1. Total computer are controlled. PLC organize from feeding to assembling. It is running steady, save motor here.
2. There are sensors to detect the process of feeding and assembling, if there are problem will automatically shut down to protect the raw materials and machinery.
3. One person can operate several machines at the same time.

项目 Project / 机型Models	技术参数 Technical parameters				
	YE-03	YE-04	YE-05	YE-06	YE-08
电源电压The power supply voltage	220V 50Hz				
外部气压The external air pressure	0.6-0.8MPa				
加工速度Processing speed	每分钟生产145-171只 Production of 145-171 per minute		每分钟生产120-150只 Production of 120-150 per minute		每分钟生产100-120只 Production of 100-120 per minute
电机功率The motor power	400W				
加工范围Processing range	3mm²	4mm²	5mm²	6mm²	8mm²
机器尺寸/重量Machine size/weight	1200mm*700mm*1600mm/250kg				

全自动端子焊接机 Automatic terminal lugs brazing machines



机器特点

1.性能可靠的合金进料确保你一个良好的钎焊效果。让你远离裂纹问题。
2.一台机器多线规生产。
3.针对不同线指标快速转换工作。
4.简单的操作指示，一个操作员可以运行多个机器。

Machine Characteristics

1.Reliable alloy feeding ensures you an excellent brazing effect. Let you free from crack issue.
2.Multi wire gauge production in one machine manufacturer.
3.Quick changeover job for different wire gauges.
4.Friendly operation indication, one operator can run several machine manu-facturers.

项目 Project / 机型Models	技术参数 Technical parameters		
	YE-H1	YE-H2	YE-H3
电源电压The power supply voltage	220V 50Hz		
外部气压The external air pressure	0.6-0.8MPa		
加工速度Processing speed	每分钟加工次数100-120次 Processing times 100-120 times per minute	每分钟加工次数80-100次 Processing times 80-100 times per minute	每分钟加工次数50-60次 Processing times 50-60 times per minute
电机功率The motor power	200W		
加工范围Processing range	1.5-8mm²	10-16mm²	25-50mm²
机器尺寸/重量Machine size/weight	1400mm*700mm*1200mm+500*500*400mm/300kg		

YE-Q1 全自动管料切断机 YE-Q1 Automatic pipe cutting machine

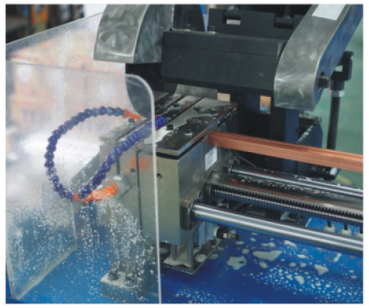

机器特点(薄壁材料专用)

1.机器主电路采用进口PLC电脑控制工作，操作集中简易、灵敏、维修简便。
2.自动送料采用伺服马达，精密丝杆，直线轴承，切割精度达到±0.01mm。
3.计数器可设置加工的数量到位自动停机。
4.计数器可累计一天的工作量记录。
5.加工尺寸变更时，无需手动定位或做硬件定位，只需在文本显示器上改动尺寸修正即可工作。

Machine Characteristics

1.Machinery main circuit is controlled by imported PLC computer, the operation is on simple, sensitive, easy maintenance.
2.Servo motors is used to automatic feeding, precision lead screw, linear bearings, cutting accuracy ±0.03mm.
3.Counters can be set the number of processing, automatic stop when it completely.
4.Counters can be accumulated record of work a day.
5.When the processing size changed, you only need to change the size in the text display to work, without manual positioning or hardware positioning.

性能项目 Performance			规格 Specifications
锯切能力	Cutting capacity	●	Φ40mm
		□	60*40mm
		■	65*45mm
		◎	Φ50mm
送料长度	Feed length		1.5mm-100mm without manual positioning 无需手动定位
进刀速度	Feed speed		Stepless adjustment 无段调整
主机马达	Host motor		2.2 or 3kW, by the order 2.2 or 3kW 依订单装置
锯片	Saw		Φ100-200mm tungsten carbide saw blade 碳化钨锯片
主轴转速	Spindle speed		500-3200RPM or by the order 500-3200RPM 或依订单装置
冷却方式	Cooling		90W water mercury for cooling 90W 冷却水泵
压缩空气	Compressed air		0.6MPa
机器尺寸	Machine dimensions		850*1600*1600mm
总重量	Total weight		about 400kg

YE-Q2 全自动管料切断机 YE-Q2 Automatic pipe cutting machine

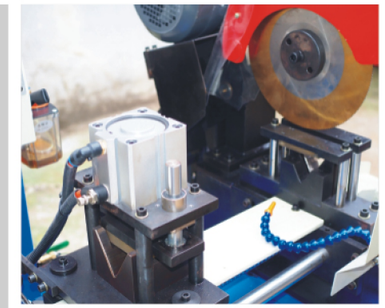

机器特点

1.机器主电路采用进口PLC电脑控制工作，操作集中简易、灵敏、维修简便。
2.自动送料采用伺服马达，精密丝杆，直线轴承，切割精度达到±0.03mm.
3.计数器可设置加工的数量到位自动停机。
4.计数器可累计一天的工作量记录。
5.加工尺寸变更时，无需手动定位或做硬件定位，只需在文本显示器上改动尺寸修正即可工作。

Machine Characteristics

1.Machinery main circuit is controlled by imported PLC computer, the operation is on simple, sensitive, easy maintenance.
2.Servo motors is used to automatic feeding, precision lead screw, linear bearings, cutting accuracy ±0.03mm.
3.Counters can be set the number of processing, automatic stop when it completely.
4.Counters can be accumulated record of work a day.
5.When the processing size changed, you only need to change the size in the text display to work, without manual positioning or hardware positioning.

性能项目 Performance			规格 Specifications
锯切能力	Cutting capacity	●	Φ60mm
		■	50*50mm
		○	Φ120mm
		⌊	115*115mm
		□	110*110mm
		▬	110*50mm
送料长度	Feed length		5mm-6m no manual positioning/servo motor 无需手动定位/伺服马达
锯片转速	Blade speeds		Stepless adjustment 无段调整100-3000RMP(switch adjustment)开关调整
主机马达	Host motor		3.7kW,2.2kW 变极双速 Consequent-poles double-speed
锯片	Saw		HSS Φ250-400mm（10"-16")standard Φ350
夹钳型式	Clamping vise		Single 单边
虎钳最大夹持	Max.clamping capacity		150mm
油缸送料行程	Cylinder feeding travel		650/single time, 1300/double-time, 1950/three-time 650/单次，1300/双次，1950/3次
油缸马达	Hydraulic motor		3HP
伺服送料行程	Servo motor feeding travel		Uninterrupted 无间断
伺服马达	Servo motor feeding travel		1kW
工作压力	Operation pressure		25-35kg/cm^2
标准配置	Standard configuration		Cooling system, oil hydraulic system, adjustment, adjustment tool 冷却系统、油压系统、调整系统
机器尺寸	Machine dimensions		2200*1400*2200mm
总重量	Total weight		1450kg

YE-Q3 全自动管料切断机 YE-Q3 Automatic pipe cutting machine

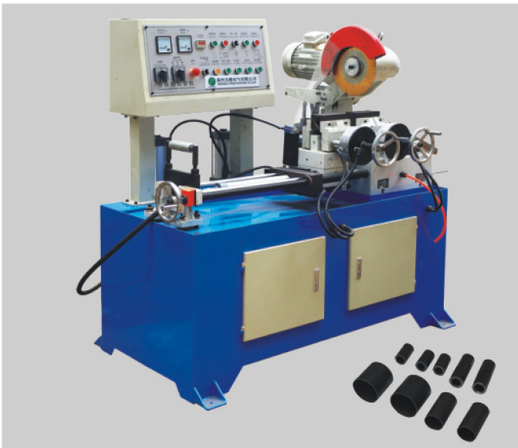

机器特点

1.机器主电路采用进口PLC电脑控制工作，操作集中简易、灵敏、维修简便。
2.自动送料采用伺服马达，精密丝杆，直线轴承，切割精度达到±0.03mm。
3.计数器可设置加工的数量到位自动停机。
4.计数器可累计一天的工作量记录。
5.加工尺寸变更时，无需手动定位或做硬件定位，只需在文本显示器上改动尺寸修正即可工作。

Machine Characteristics

1.Machinery main circuit is controlled by imported PLC computer, the operation is on simple, sensitive, easy maintenance.
2.Servo motors is used to automatic feeding, precision lead screw, linear bearings, cutting accuracy ±0.03mm.
3.Counters can be set the number of processing, automatic stop when it completely.
4.Counters can be accumulated record of work a day.
5.When the processing size changed, you only need to change the size in the text display to work, without manual positioning or hardware positioning.

性能项目 Performance		规格 Specifications
锯切能力 Cutting capacity	●	Φ80mm
	□	110*110mm
	■	110*90mm
	⊗	Φ110mm
送料长度 Feed length		Feed continuously 无间断连接送料
进刀速度 Feed speed		Stepless adjustment 无段调整
主机马达 Host motor		4 or 5.5kW,by the order 4 or 5.5kW,依订单装置

性能项目 Performance	规格 Specifications
锯片 Saw	Φ355mm tungsten carbide saw blade 碳化钨锯片
	Φ350mm high speed hacksaw 高速钢锯片
主轴转速 Spindle speed	2850RPM or by the order 2850RPM或依订单装置
冷却方式 Cooling	Cooling water or mist cooling 强制水冷或油雾冷却
压缩空气 Compressed air	0.6MPa 2500NL/min
机器尺寸 Machine dimensions	1900*1300*1650mm
总重量 Total weight	about 1200kg

全自动铝切机/ Automatic cutting machine for aluminum section



机器特点(铝型材异型)

1.机器主电路采用进口PLC电脑控制工作，操作集中简易、灵敏、维修简便。
2.自动送料采用伺服马达，精密丝杆，直线轴承，切割精度达到±0.03mm。
3.计数器可设置加工的数量到位自动停机。
4.计数器可累计一天的工作量记录。
5.加工尺寸变更时，无需手动定位或做硬件定位，只需在文本显示器上改动尺寸修正即可工作。

Machine Characteristics

1.Machinery main circuit is controlled by imported PLC computer, the operation is on simple, sensitive, easy maintenance.
2.Servo motors is used to automatic feeding, precision lead screw, linear bearings, cutting accuracy ±0.03mm.
3.Counters can be set the number of processing, automatic stop when it completely.
4.Counters can be accumulated record of work a day.
5.When the processing size changed, you only need to change the size in the text display to work, without manual positioning or hardware positioning.

性能项目 Performance		规格 Specifications
送料长度	Feed length	6-600mm 可连续三次送料 Can feed three times in a row
主机马达	Host motor	4HP/5P
锯片	Saw	Φ400mm tungsten carbide saw blade 碳化钨锯片
主轴转速	Spindle speed	2500-2800RPM
冷却方式	Cooling	Cooling water or mist cooling 强制水冷或油雾冷却
压缩空气	Compressed air	0.6-0.8MPa
机器尺寸	Machine dimensions	1650*680*1400mm
总重量	Total weight	about 400kg

Automatic machine production bus bar terminal

YE-MU1

YE-MU3

YE-MU4

YE-MU2

技术参数 Technical parameter

Model	YE-MU1/YE-MU2/YE-MU3/YE-MU4
function position	Drilling/chamfering/tapping/cutting, also can customized for marking dimpling milling and so on
Processing objects	Terminal block, terminal bar
Power supply	Three phase 380V 50Hz
Feeding way	Automatic feeder
Processing speed	About 8000-10000 pcs/8 hours
Package	Wooden case
Gross weight	650kgs
Length * width * height(mm)	3100*1150*1800

摩擦焊接机YE-C20/Frication welding machine for bi-metallic lugs

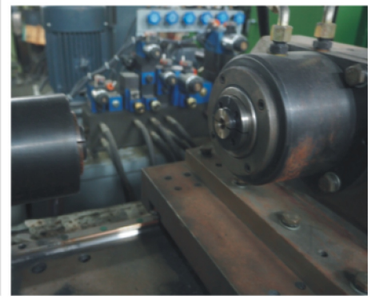

机器特点

1.YE-C20型摩擦焊接机是以液压传动，半自动连续驱动焊机主要用于中型轴类零件的焊接。
2.可焊金属范围广，特别适应于焊接异种金属。焊接表面不易氧化，接头组织细密(锻造组织)，不易产生气孔、裂缝等缺陷。通常可以比较得到与母材强度相同的接头。
3.本机具有参数重现性好，焊接质量稳定，容易实现工艺参数及质量的自动控制。
4.劳动条件好，无环境污染，便于放在机械生产线上生产使用。生产效率高，如铜铝金具的焊接，每小时可达300-500件。耗电量小，节省能源。焊接过程不用添加任何材料，性价比高。

Machine Characteristics

1.YE-C20 type friction welding machine is a hydraulic drive, semi automatic continuous drive welding machine is mainly used for middle shaft parts of the welding.
2.A wide range of weld metal, especially suitable for welding dissimilar metals. The welding surface is not easy oxidation, microstructure (fine forging organization), not easy to produce pores, cracks and other defects. Usually can be compared with the base metal strength of the same joint.
3.This machine has the advantages of good reproducibility, stable welding quality easy to realize the automatic control of process parameter sand quality.
4.Working conditions are good, no environmental pollution, easy to put on the production line of mechanical production. The production efficiency is high, such as welding copper fittings, up to 300-500 pieces perhour. Low power consumption, energy saving. Welding process without adding any material. High performance to price ratio.

性能项目 Performance		规格 Specifications
最大顶锻力	Max. Force Power	200KN
焊接直径	Weld diameter	14mm-35mm
旋转夹具夹料长度	Rotating damp damping length	50mm-200mm
移动夹具夹料长度	Clamping length of movable clamp	80mm-800mm
滑台行程	Slide travel	300mm
主轴转速	Spindle speed	560r/min
生产效率	Production efficiency	300-500pcs/hour
主电机功率	Main motor power	18.5kW
油泵电机功率	Oil pump motor power	9.5kW
主机尺寸	Machine size	3200mm×750mm×1350mm
液压站尺寸	Hydraulic station size	1800mm×1350mm×1600mm
机器重量	Machine weight	5000kgs

Automatic cable lugs mould system

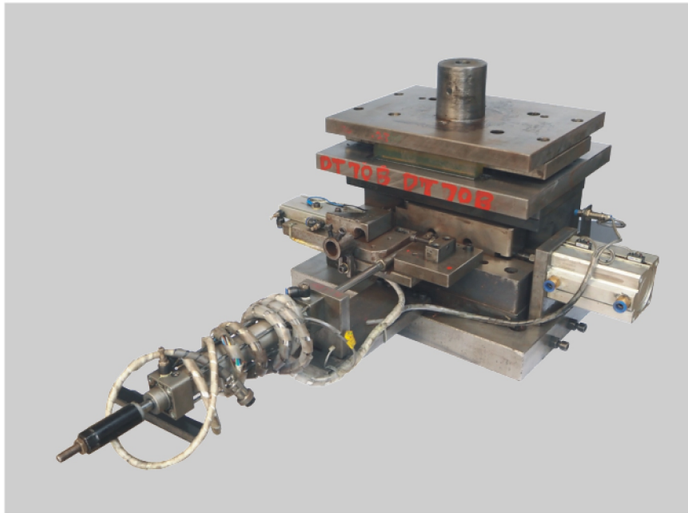





机器特点

1.机器主电路采用进口PLC电脑控制工作，操作集中简易、灵敏、维修简便。
2.振动盘自动送料，减少操作风险。
3.冲压模具通用可调整。
4.提高工作效率，30-40只每分钟。

Machine Characteristics

1.The main circuit of the machine adopts imported PLC computer control work, the operation is simple, sensitive and easy to maintain.
2.Vibration plate automatic feeding, reduce operational risk.
3.Stamping die general can be adjusted.
4.Improve work efficiency, 30-40 only per minute.

性能项目 Performance		规格 Specifications	
金具尺寸 Cable lugs size	10-50	Same controller	Same vabition
	70-120		Same vabition
	150-240	Same controller	Same vabition

There is customized mould system, we will make the best offer after check your drawing.

Cable lugs we can make for you

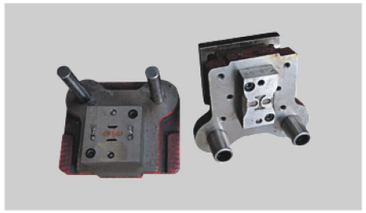
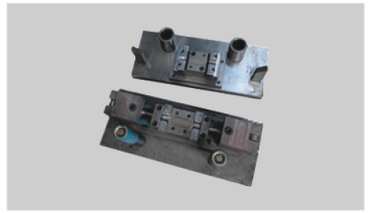

尼龙扎带模具/Nylon cable tie inject mould

尼龙扎带模具规格表 FORM OF NYLON CABLE TIE MOULD

规格Size	长度Length (mm)	宽Width (mm)	厚Thickness (mm)	腔数(模)Cavity PCS	模具外形尺寸 Dimension(mm)	重量Weight (kgs)	适合机型 Inject machine
3*60	60	2.4	0.9	136	520×250×250	255	150T
3*80	80	2.4	1	120	470×290×250	270	150T
3*100	100	2.4	1	120	470×330×260	315	150T
3*120	120	2.4	1.05	100	410×370×260	310	150T
3*150	150	2.4	1.1	80	430×350×260	310	150T
3*200	200	2.4	1.15	68	520×320×270	350	150T
4*150	150	3.6	1.1	68	430×380×270	345	280T
4*200	200	3.6	1.25	52	520×320×270	350	280T
4*250	250	3.6	1.3	40	620×270×270	355	280T
4*280	280	3.6	1.3	32	680×240×270	345	280T
4*300	300	3.6	1.3	28	720×210×270	320	280T
4*370	370	3.6	1.35	24	790×190×270	320	280T
5*180	180	4.6	1.2	52	490×340×270	353	280T
5*200	200	4.6	1.25	48	520×320×270	352	280T
5*250	250	4.6	1.3	32	620×250×270	330	280T
5*280	280	4.6	1.3	28	680×230×270	332	280
5*300	300	4.6	1.35	28	720×230×270	350	280T
5*350	350	4.6	1.35	24	750×210×270	333	280T
5*380	380	4.6	1.4	24	810×210×270	360	280T
5*400	400	4.6	1.4	20	850×190×270	342	280T
5*450	450	4.6	1.45	16	650×250×270	345	280T
5*500	500	4.6	1.45	14	720×240×270	366	280T
8*200	200	7.2	1.25	32	450×330×270	314	280T
8*250	250	7.2	1.3	28	550×300×270	350	280T
8*300	300	7.2	1.3	24	650×270×270	372	280T
8*350	350	7.2	1.35	20	750×220×270	350	280T
8*380	380	7.2	1.4	16	810×190×270	326	280T
8*400	400	7.2	1.45	16	850×190×270	342	280T
8*450	450	7.2	1.45	12	650×290×270	400	280T
8*500	500	7.2	1.5	12	720×290×270	442	280T
8*550	550	7.2	1.5	10	810×260×270	446	280T
10*500	500	9	1.5	8			280T
10*550	550	9	1.6	6			280T
10*600	600	9	1.6	6			280T
10*650	650	9	1.6	4			280T
10*780	780	9	1.7	4			280T
10*750	750	9	1.7	4			280T
10*800	800	9	1.7	4			280T
10*850	850	9	1.8	4			280T
10*900	900	9	1.8	2			280T
10*1000	1000	9	1.8	2			280T
10*1100	1100	9	2	2			280T
10*1200	1200	9	2	2			280

塑料护套/PVC sleeve

Please offer us your id x 0d x length and color enquiry
We can offer customize

自动打点机YE-S1/ Automatic knotching machine

双头自动打点机YE-SD1/ Double side dimpling machine





端子合集
Terminal and connector

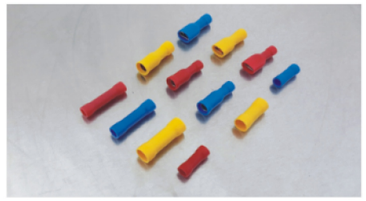

Fully-insulated Vinyl Crimp Terminal

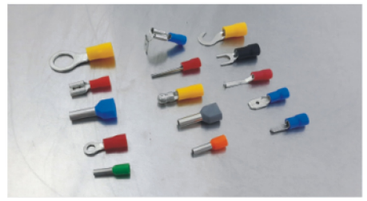

Vinyl Insulated Crimp Wire Terminal

Non-insulated Wire Terminal Connector

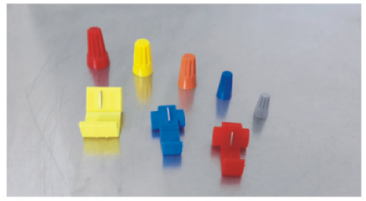

Quick Connector

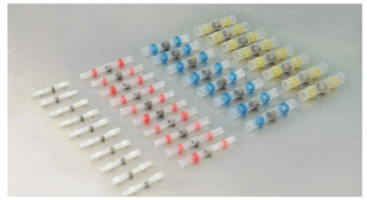

Solder Sleeve Butt Connector

Nylon Electric Terminal Disconnects

Heat Shrink Terminal Disconnector

Butt Connector

Nylon Wire Insulated Terminal